

CLIC angular Spacer H2.5 - H85

1. Product Description

- Angular spacer made of polyamide
- For distance mounting (2.5 up to 85 mm) of all types of CLIC plastic pipe clamps.

2. Features

- Knurled crown for precise positioning of the Clic
- High stability thanks to flat pyramid shape
- Very good chemical resistance
- Halogen and phosphorus free
- Available in
 - Black (RAL 9011)
 - Dark Grey (RAL 7001)
 - Light Grey (RAL 7035)



3. Material Data


Material	PA 6
Tensile modulus of elasticity	3200 N/mm ²
Temperature resistance	- 40 °C to + 90 °C
Flammability	HB according to UL 94
Halogen	free

4. Chemical Resistance


Petrol, diesel, oil	resistant
Corrosion	resistant
UV resistance	limited, depending on colour
Resistant to weathering	no decomposition when used as intended

5. Dimensions


type	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]
2,5	2,5	24	25	21	20
5	5	24	25	21	20
15	15	24	30	21	20
25	25	24	30	21	20
35	35	24	30	21	20
45	45	24	30	21	20
65	65	24	30	21	20
85	85	30	50	30	23

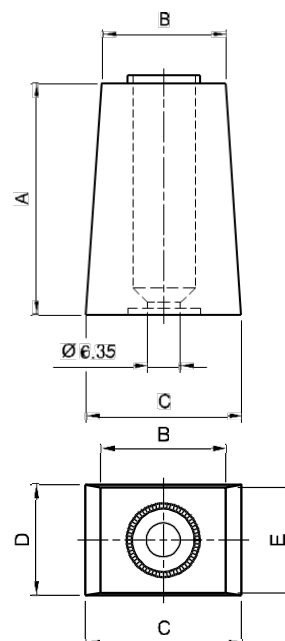

6. Installation

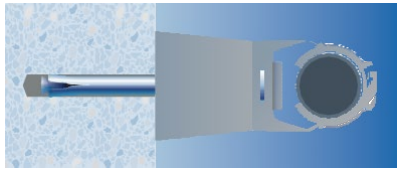

CLIC clamp,
CLIC spacer
CLIC sliding nut
Metal anchor or Delta dowel

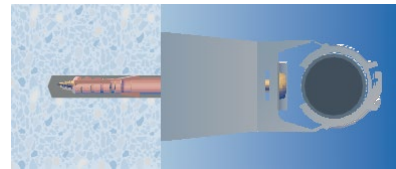

7. Conformity

REACH, RoHS

8. Safety Data Sheet

Not applicable

9. Manufacturer/Brand

EFCO Befestigungstechnik AG
Grabenstrasse 1 • 8606 Nänikon • Schweiz



CLIC is a registered international trademark of EFCO and is 100% produced in Switzerland

10. Accessories

Further accessories for distance mounting, multiple fastenings etc. can be found on the CLIC-Website.

11. Links/Downloads

For more information, see:

EFCO-Website/EFCO-Shop <http://www.efco.swiss>