

CLIC Spacer H50 / H80


1. Product Description

- Round spacer made of polyamide black
- For distance mounting (50 or 80 mm) of CLIC TOP and CLIC TOP-T plastic pipe clips indoors and outdoors

Spacer	Item-Nr.	Height [mm]	Base/Top Ø [mm]
CLIC Spacer H 50	A88274	50	60/30
CLIC Spacer H 80	A88275	80	60/30

2. Features

- High stability thanks to round shape
- Stable due to high toughness plastic
- Very good chemical resistance
- Halogen and phosphorus free

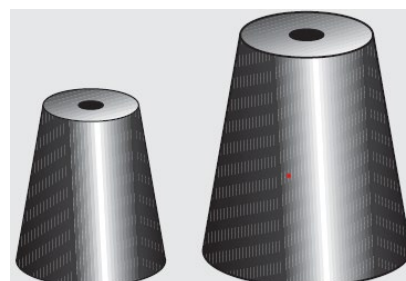

3. Material Data

Material	PA 6
Tensile modulus of elasticity	3200 N/mm ²
Temperature resistance	- 40 °C to + 90 °C
Flammability	V-2 according to UL 94
Halogen	free

4. Chemical Resistance

Petrol, diesel, oil	resistant
Corrosion	resistant
UV resistance	good
Resistant to weathering	no decomposition when used as intended

5. fire load according to UL94

Designation	Item Nr.	Weight gr/pc	Heat value MJ / pc
CLIC Spacer Ø 50	A88274	20.41	0,63271
CLIC Spacer Ø 80	A88275	33,80	1,04780

6. Conformity

REACH, RoHS

7. Safety Data Sheet

Not applicable

8. Brand

EFCO Befestigungstechnik AG
Grabenstrasse 1 • 8606 Nänikon • Schweiz



CLIC is a registered international trademark of EFCO and is 100% produced in Switzerland

9. Accessories

Further accessories for distance mounting, multiple fastenings etc. can be found on the CLIC-Website.

10. Links/Downloads

For more information, see:

EFCO-Website/EFCO-Shop <http://www.efco.swiss>

The information is based on our current technical knowledge and is intended as a guide. The chemical resistance must be clarified in individual cases on the basis of your own tests.

For further technical information, please contact EFCO